
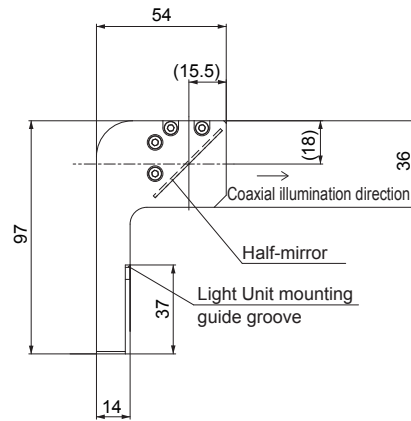


➤ Dimensions (mm)

CU-LNSP2-100-GL / -200-GL / -300-GL / -400-GL / -500-GL


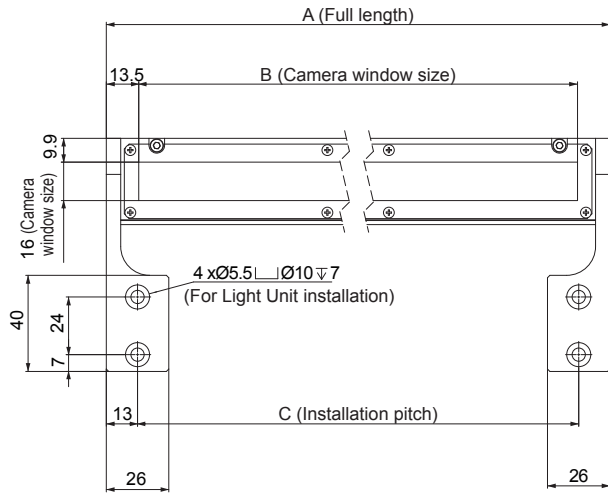


Four M5 screws and nuts are included for installing the Coaxial Unit on the Light Unit.

For a custom order, we can change the location where the light cable comes out of the Light Unit (LNSP2) case on which the Coaxial Unit is installed. Please contact your CCS sales representative for details.

Model name	Dimension A	Dimension B	Dimension C	Model name	Dimension A	Dimension B	Dimension C
CU-LNSP2-100-GL	112	85	86	CU-LNSP2-400-GL	412	385	386
CU-LNSP2-200-GL	212	185	186	CU-LNSP2-500-GL	512	485	486
CU-LNSP2-300-GL	312	285	286				

CU-LNSP-100-GL / -200-GL / -300-GL / -400-GL / -500-GL

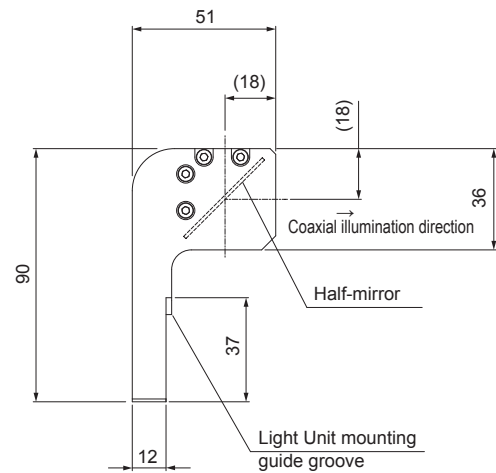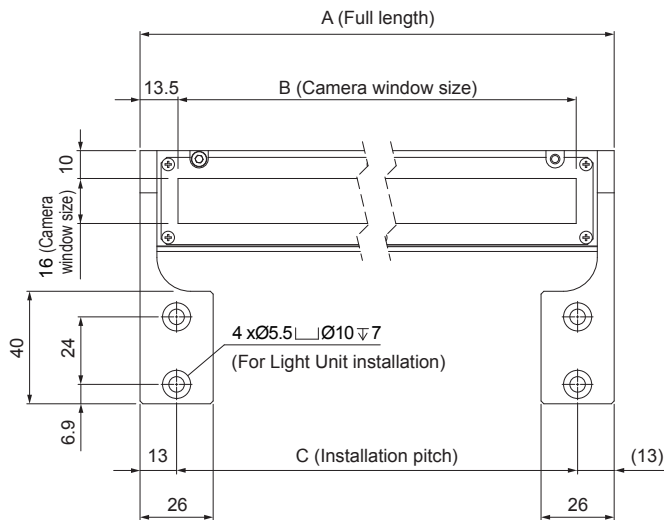

Four M5 screws and nuts are included for installing the Coaxial Unit on the Light Unit.

Model name	Dimension A	Dimension B	Dimension C	Model name	Dimension A	Dimension B	Dimension C
CU-LNSP-100-GL	112	85	86	CU-LNSP-400-GL	412	385	386
CU-LNSP-200-GL	212	185	186	CU-LNSP-500-GL	512	485	486
CU-LNSP-300-GL	312	285	286				