


型式_Model name	A寸法_Dimensions of A
PFB3-20SW-PJT-CS1(A)	17.8
PFB3-20SW-PJT-DJ1(A)	11.8
PFB3-20SW-PJT-DJ2(A)	11.8
PFB3-20SW-PJT-DJ3(A)	11.8
PFB3-20SW-PJT-DJ4(A)	11.8
PFB3-20SW-PJT-HY(A)	5.8
PFB3-20SW-PJT-IT(A)	17.45
PFB3-20SW-PJT-MI(A)	6.8
PFB3-20SW-PJT-MO(A)	22.8
PFB3-20SW-PJT-NP(A)	16.8
PFB3-20SW-PJT-SH1(A)	11.5
PFB3-20SW-PJT-SH2(A)	10.8
PFB3-20SW-PJT-SU(A)	15.8
PFB3-20SW-PJT-TE(A)	11.8
PFB3-20SW-PJT-TF(A)	15.8
PFB3-20SW-PJT-VL(A)	8

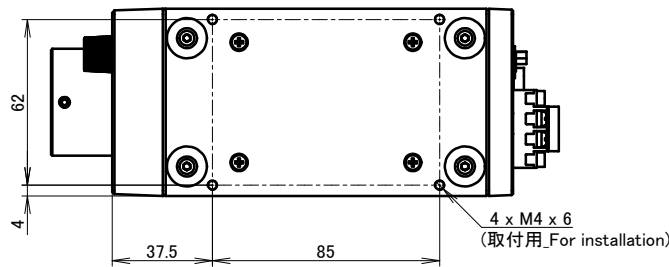

入力電圧_Input Voltage : DC 24V
消費電力_Power Consumption : 18W

UNIT:mm

REVISION	DATE	DESCRIPTION	REVISED
000			

ISSUE DATE	SCALE	APPROVED	NAME
2021/10/01	1:2	T.OSAWA	PFB3-20SW-PJT(A)(口金16シリーズ_Adapter 16 Series)
		CHECKED	DRAWING NAME
		Y.INOUE	外観図_outline
		DESIGNED	DRAWING No.
		PROJECTION	REVISION
		Y.NAKAJIMA	01
		DRAWN	000
		Y.NAKAJIMA	01
			01

