


型式_Model name	A寸法_Dimensions of A
PFB3-20SW-SJT-CS1(A)	17.8
PFB3-20SW-SJT-DJ1(A)	11.8
PFB3-20SW-SJT-DJ2(A)	11.8
PFB3-20SW-SJT-DJ3(A)	11.8
PFB3-20SW-SJT-DJ4(A)	11.8
PFB3-20SW-SJT-HY(A)	5.8
PFB3-20SW-SJT-IT(A)	17.45
PFB3-20SW-SJT-MI(A)	6.8
PFB3-20SW-SJT-MO(A)	22.8
PFB3-20SW-SJT-NP(A)	16.8
PFB3-20SW-SJT-SH1(A)	11.5
PFB3-20SW-SJT-SH2(A)	10.8
PFB3-20SW-SJT-SU(A)	15.8
PFB3-20SW-SJT-TE(A)	11.8
PFB3-20SW-SJT-TF(A)	15.8
PFB3-20SW-SJT-VL(A)	8

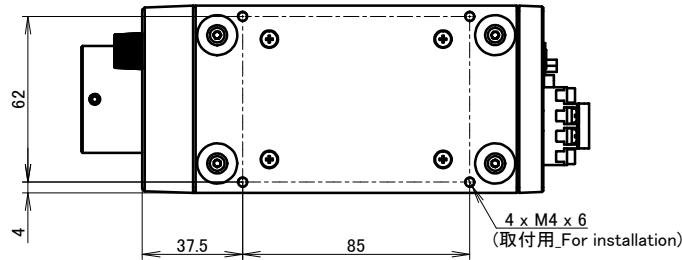

入力電圧\_Input Voltage : DC 24V  
消費電力\_Power Consumption : 18W

UNIT:mm

REVISION	DATE	DESCRIPTION	REVISED
000			

ISSUE DATE	SCALE	APPROVED	NAME
2021/07/01	1:2	T.OSAWA	PFB3-20SW-SJT(A)(口金16シリーズ_Adapter 16 Series)
		CHECKED	DRAWING NAME
		Y.INOUE	外觀図_outline
		DESIGNED	DRAWING No.
		PROJECTION	REVISION
		Y.NAKAJIMA	01
		DRAWN	000
		Y.NAKAJIMA	01
			01

