


➤ Dimensions (mm)

LV-27RD2/SW2/BL2/GR2

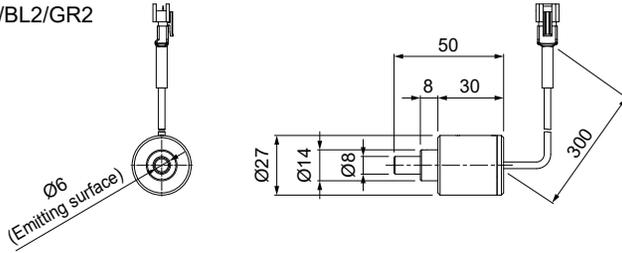

You can change the connectors of the Light Unit cable. Choose between M12 connectors and flying leads. Refer to P.7 for details.

Note

- Use as a Spot Light for directly illuminating the workpiece.
- In addition to Light Units with a tip radius of Ø8 mm, we also offer Ø10 mm and Ø12 mm as custom orders.